

DIN rail perforated - NS 15 PERF 250MM - 1207644

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver



Key Commercial Data

| | |
|------------------------|---------------------|
| Packing unit | 20 pc |
| Minimum order quantity | 20 pc |
| GTIN | 4 046356 366021 |
| GTIN | 4046356366021 |

Technical data

Dimensions

| | |
|--------------------|---------|
| Height | 5.5 mm |
| Length | 250 mm |
| Width | 15 mm |
| Hole width | 12.2 mm |
| Hole height | 4.2 mm |
| Drill hole spacing | 20 mm |

Standards and Regulations

| | |
|----------------------------------|------------------|
| Test standard | acc. to EN 60715 |
| Connection in acc. with standard | IEC / EN |


Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

DIN rail perforated - NS 15 PERF 250MM - 1207644

Dimensional drawing

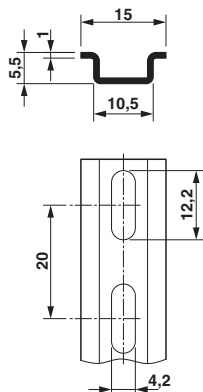

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27400602 |
| eCl@ss 11.0 | 27400602 |
| eCl@ss 4.0 | 23150300 |
| eCl@ss 4.1 | 23150300 |
| eCl@ss 5.0 | 27141100 |
| eCl@ss 5.1 | 27141100 |
| eCl@ss 6.0 | 27141100 |
| eCl@ss 7.0 | 27141143 |
| eCl@ss 9.0 | 27400602 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001285 |
| ETIM 3.0 | EC001285 |
| ETIM 4.0 | EC000212 |
| ETIM 6.0 | EC001285 |
| ETIM 7.0 | EC001285 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30212109 |
| UNSPSC 7.0901 | 39121708 |
| UNSPSC 11 | 39121708 |
| UNSPSC 12.01 | 39121708 |
| UNSPSC 13.2 | 39121708 |
| UNSPSC 18.0 | 39121708 |
| UNSPSC 19.0 | 39121708 |
| UNSPSC 20.0 | 39121708 |
| UNSPSC 21.0 | 39121708 |

Phoenix Contact 2021 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>