

### Completely pre-assembled Signal Towers / KOMPAKT 37

# K37 cable EM 24VAC/DC YE/RD



Part No.:	698.130.75		NoHS2		UK
Series:	Kompakt 37	7	ROH52	c <b>QL</b> ) us	CA

MECHANICAL DATA		
Height	141 mm	
Diameter	38 mm	
Materials	PC	
Dome colour	Red Yellow	
Housing colour	Black	
Protection category	IP65	
Connection	Cable	
cross-sectional area maximum	0,34mm <sup>2</sup> / 22AWG	
Cable entry	Membrane grommet	
Cable entry minimum	d = 1 mm	
Cable entry maximum	d = 9 mm	
Cable length	2000 mm	
Tension relief	Pull-out protection	
Type of fixing	Built-in mounting	
Working temperature minimum	-20°C	
Working temperature maximum	+50°C	
Weight with packaging	180 g	
Product weight	147 g	

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	60 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3	
	In the connection area: 2	

OPTICAL DATA				
Light source	LED			
Light colour	Red Yellow			
Optical signal image	Permanent			
Service life optical	50,000 h maximum			

#### **APPROVAL DATA**

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



### Completely pre-assembled Signal Towers / KOMPAKT 37

# K37 cable EM 24VAC/DC YE/RD


Conforms with CE	Yes
WEEE	Yes
Conforms with RED directive	No
Conform with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	CULus
UL Type Rating	Type 12 Type 4X
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with GL	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

## K37 cable EM 24VAC/DC YE/RD

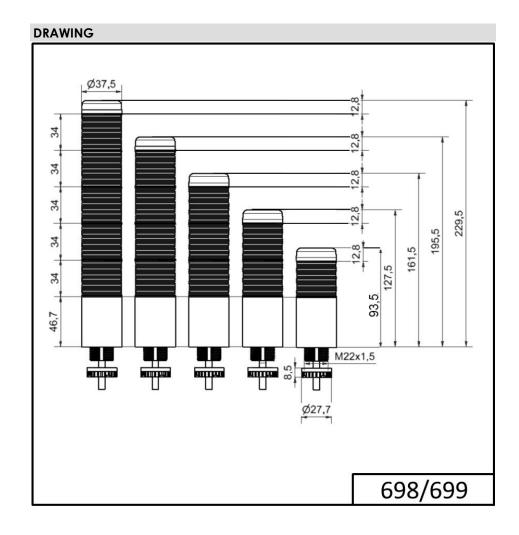

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.