
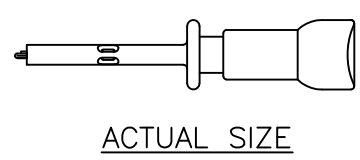
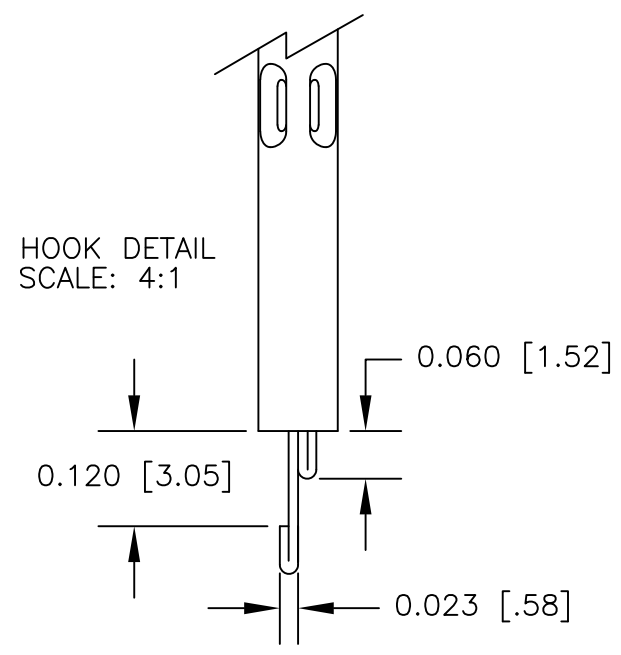


NOTES: UNLESS OTHERWISE SPECIFIED

- CONSTRUCTION:
HOUSING & PLUNGER: NYLON. AVAILABLE IN 10 COLORS
CONTACT BLADE: GOLD PLATED BeCu
SPRING: STAINLESS STEEL
- PERFORMANCE:
MAXIMUM CURRENT: 4.4 AMPS WITH A 76°F TEMPERATURE RISE.
MAXIMUM VOLTAGE: 2.4 kV
MAXIMUM TEMPERATURE: 200°F (93°C)
- FEATURES:
SLIPS INTO PC BOARD TEST POINT HOLES AND LOCKS ONTO THE BOARD
FITS HOLE $\phi 0.040$ [$\phi 1.02$] TO $\phi 0.042$ [$\phi 1.07$].
FIELD SERVICEABLE.

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

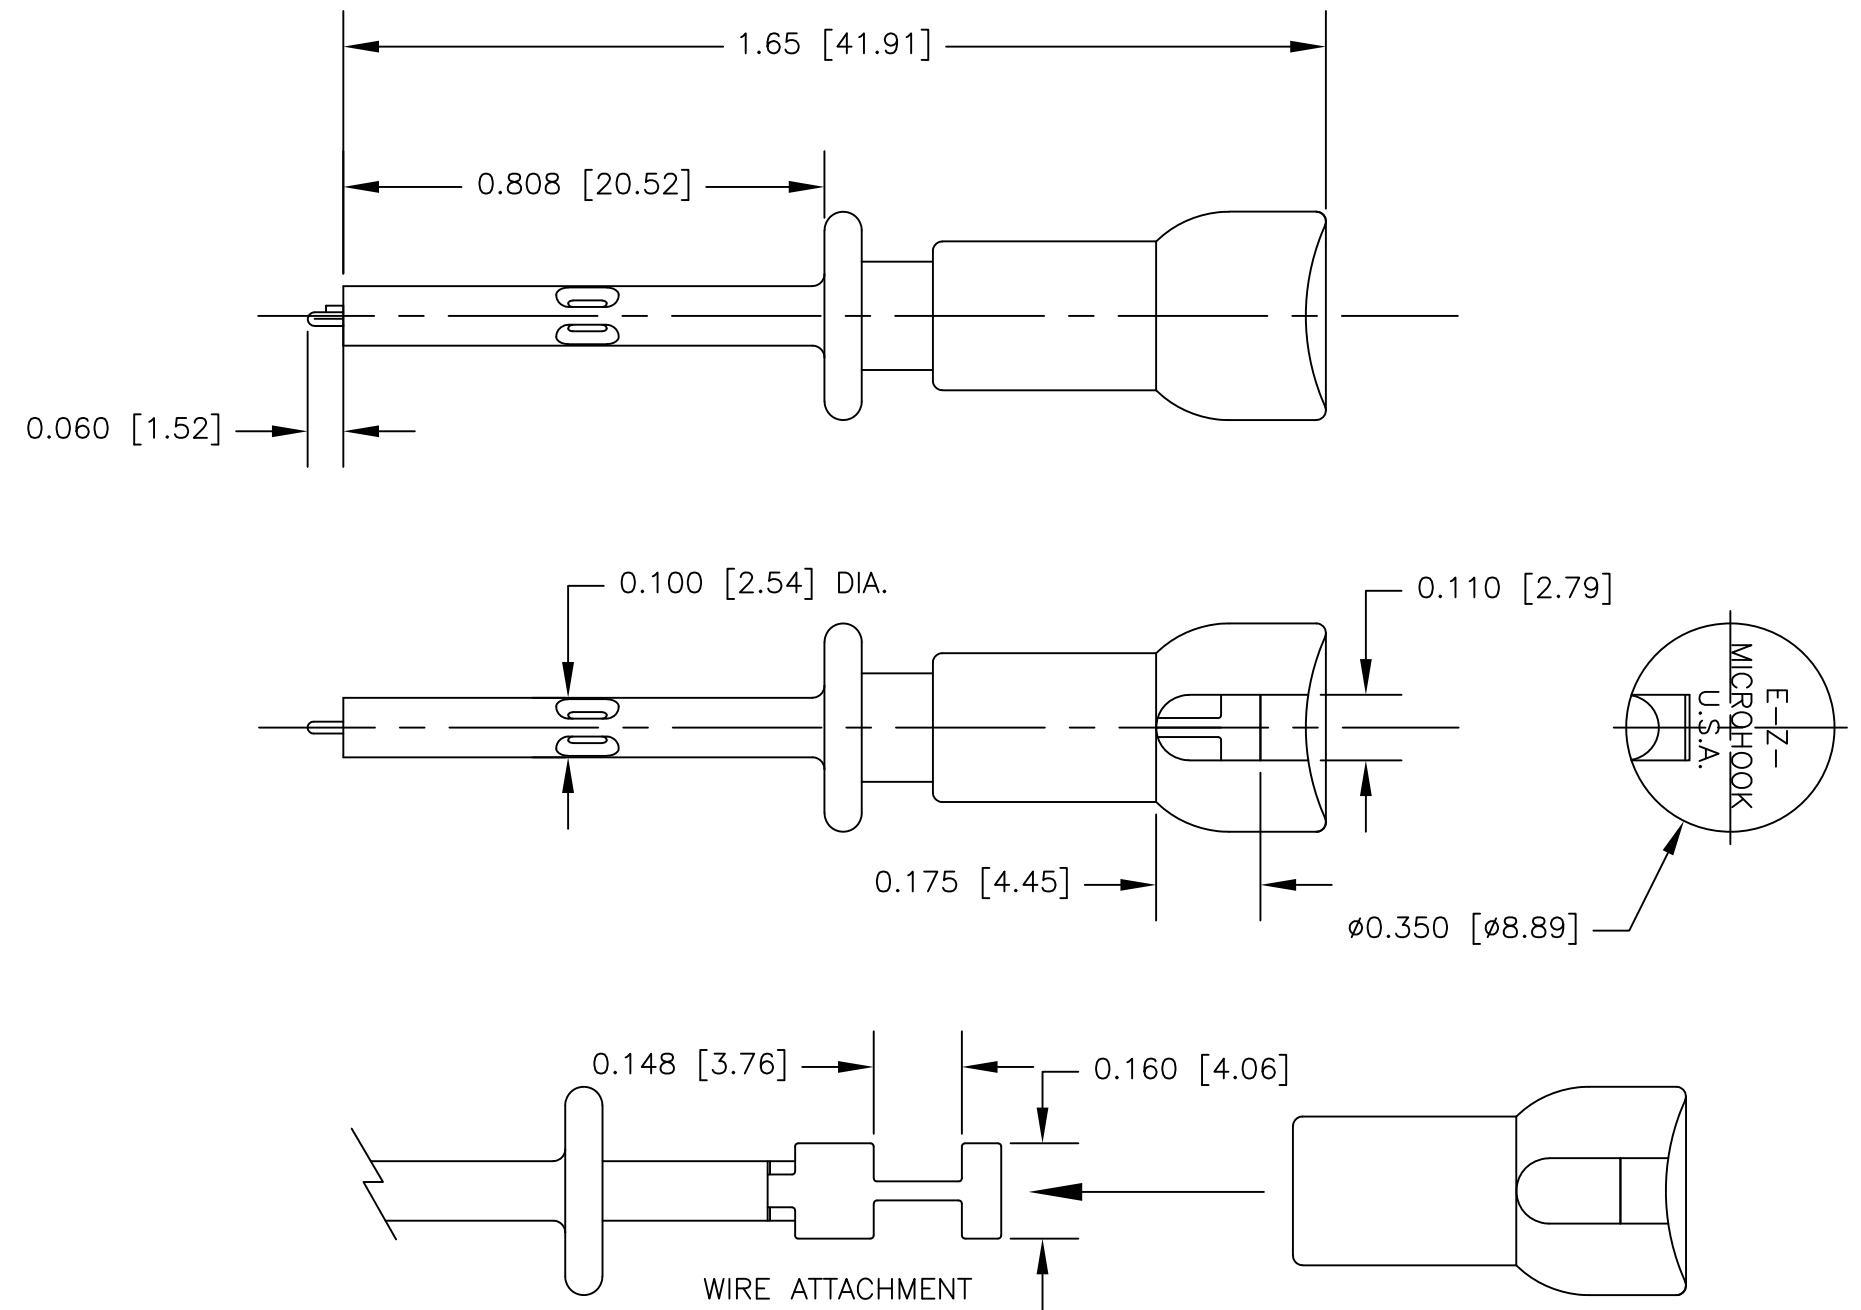

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
		MATERIAL SEE NOTES	DRAWN R.L.	7/09	DESCRIPTION E-Z-HOOK MICRO-LOCK HOOK CONNECTOR
		FINISH SEE NOTES	APPROVED BY		
NEXT ASSY	USED ON				SIZE B
APPLICATION		DO NOT SCALE DRAWING			CODE IDENT NO. 08505
					DRAWING NO. XG40
					REV.
					SCALE 3:1
					SHEET 1 OF 1