


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9205-HS  
 INSULATOR: HEAT SHRINK TUBING. BLACK.  
 BODY: NICKEL UNDERPLATED BRASS.  
 CONTACT: GOLD FLASH OVER NICKEL UNDERPLATED BRASS.  
 GOLD FLASH BeCu SPRING.
2. P/N: W-200/COLOR  
 22AWG TINNED COPPER  
 0.070 [1.78] O.D. PVC INSULATION  
 AVAILABLE IN TEN COLORS.
3. PERFORMANCE  
 MAXIMUM CURRENT: 2.5 AMPS  
 MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC  
                           HANDS FREE: 1000 W.V.D.C.  
 MAXIMUM TEMPERATURE: 176°F (80°C)

| REVISIONS |             |      |          |
|-----------|-------------|------|----------|
| LTR       | DESCRIPTION | DATE | APPROVED |
|           |             |      |          |

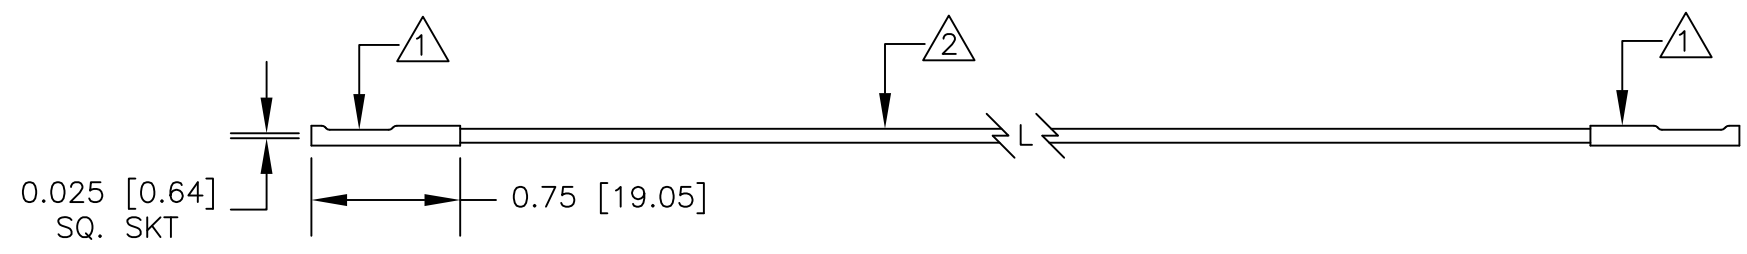

|             |         |                                                                                                                               |              |                |                                                                      |      |
|-------------|---------|-------------------------------------------------------------------------------------------------------------------------------|--------------|----------------|----------------------------------------------------------------------|------|
|             |         | UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN INCHES<br>TOLERANCES ARE:<br>FRACTIONS DECIMALS ANGLES<br>± .XX ± ±<br>.XXX ± | CONTRACT NO. |                | <b>E-Z-HOOK</b> DIVISION OF TEKTEST INC.<br>ARCADIA, CA 91006 U.S.A. |      |
|             |         |                                                                                                                               | APPROVALS    | DATE           |                                                                      |      |
|             |         | MATERIAL<br>SEE NOTE.                                                                                                         | DRAWN        | R.L.           | 11/12                                                                |      |
|             |         |                                                                                                                               | APPROVED BY  |                |                                                                      |      |
|             |         | FINISH<br>SEE NOTE.                                                                                                           |              |                | DESCRIPTION                                                          |      |
| NEXT ASSY   | USED ON |                                                                                                                               |              |                | 0.025 [0.64] SQ. SOCKET (9205-HS)<br>JUMPER                          |      |
| APPLICATION |         | DO NOT SCALE DRAWING                                                                                                          | SIZE         | CODE IDENT NO. | DRAWING NO.                                                          | REV. |
|             |         |                                                                                                                               | <b>B</b>     | <b>08505</b>   | <b>9110</b>                                                          |      |
|             |         |                                                                                                                               | SCALE        | 1:1            | SHEET 1 OF 1                                                         |      |