

Midi free-standing Beacons / EvoSIGNAL  
**Midi TwinFLASH 12/24VAC/DC CL**



<b>Part No.:</b>	<b>261.420.70</b>
<b>Series:</b>	<b>EvoSIGNAL Midi</b>



MECHANICAL DATA	
Height	130 mm
Diameter	85 mm
Materials	PC PC/ABS
Dome colour	Clear
Housing colour	Grey
Protection category	IP66
Connection	Push-in terminal
cross-sectional area minimum	0,25mm <sup>2</sup> / 24AWG
cross-sectional area maximum	1,50mm <sup>2</sup> / 16AWG
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	189 g
Product weight	147 g

ELECTRICAL DATA	
Operating voltage	12V 24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	12 VDC
Rated operational current	150 mA
Rated inrush current	1A
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	III

OPTICAL DATA	
Light source	LED
Light colour	White
Optical signal image	EVS Flash TwinFlash
Flash frequency	1 Hz
Service life optical	50,000 h minimum
Pulse- & pause Duration [ms]	28ON, 164OFF, 28ON, 744OFF

APPROVAL DATA	
Conforms with CE	Yes

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / EvoSIGNAL

## Midi TwinFLASH 12/24VAC/DC CL


WEEE	Yes
Conform with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with GL	No
Conforms with RoHS CN	No
Conforms with VdS	No



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / EvoSIGNAL

**Midi TwinFLASH 12/24VAC/DC CL**

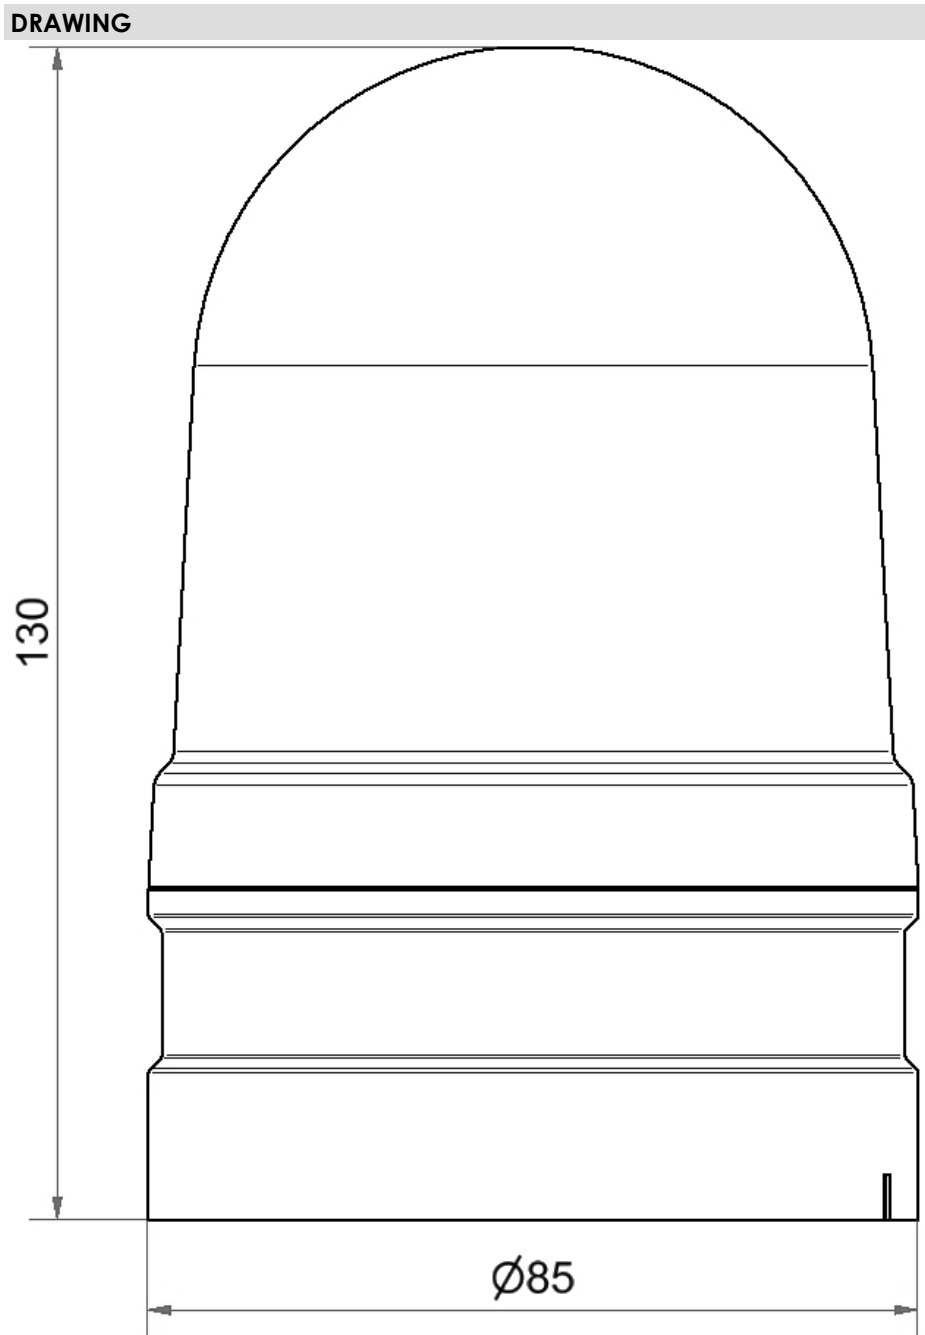

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.