

Midi free-standing Beacons / EvoSIGNAL
Midi Rotating 12/24V AC/DC CL



| | |
|-----------|----------------|
| Part No.: | 261.440.70 |
| Series: | EvoSIGNAL Midi |

**MECHANICAL DATA**

| | |
|------------------------------|-----------------------------|
| Height | 130 mm |
| Diameter | 85 mm |
| Materials | PC PC/ABS |
| Dome colour | Clear |
| Housing colour | Grey |
| Protection category | IP66 |
| Connection | Push-in terminal |
| cross-sectional area minimum | 0,25mm ² / 24AWG |
| cross-sectional area maximum | 1,50mm ² / 16AWG |
| Working temperature minimum | -30°C |
| Working temperature maximum | +60°C |
| Weight with packaging | 212 g |
| Product weight | 170 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 12V 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 12 VDC |
| Rated operational current | 120 mA |
| Rated inrush current | 1A |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | III |

OPTICAL DATA

| | |
|------------------------------|------------------|
| Light source | LED |
| Light colour | White |
| Optical signal image | Revolving |
| Service life optical | 50,000 h minimum |
| Rotation speed (rpm) | 180 U/min |
| Pulse- & pause Duration [ms] | 55ON, 278OFF |

APPROVAL DATA

| | |
|-----------------------------|-----|
| Conforms with CE | Yes |
| WEEE | Yes |
| Conform with ATEX-directive | No |



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / EvoSIGNAL


Midi Rotating 12/24V AC/DC CL

| | |
|---------------------------|---------|
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with GL | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / EvoSIGNAL
Midi Rotating 12/24V AC/DC CL

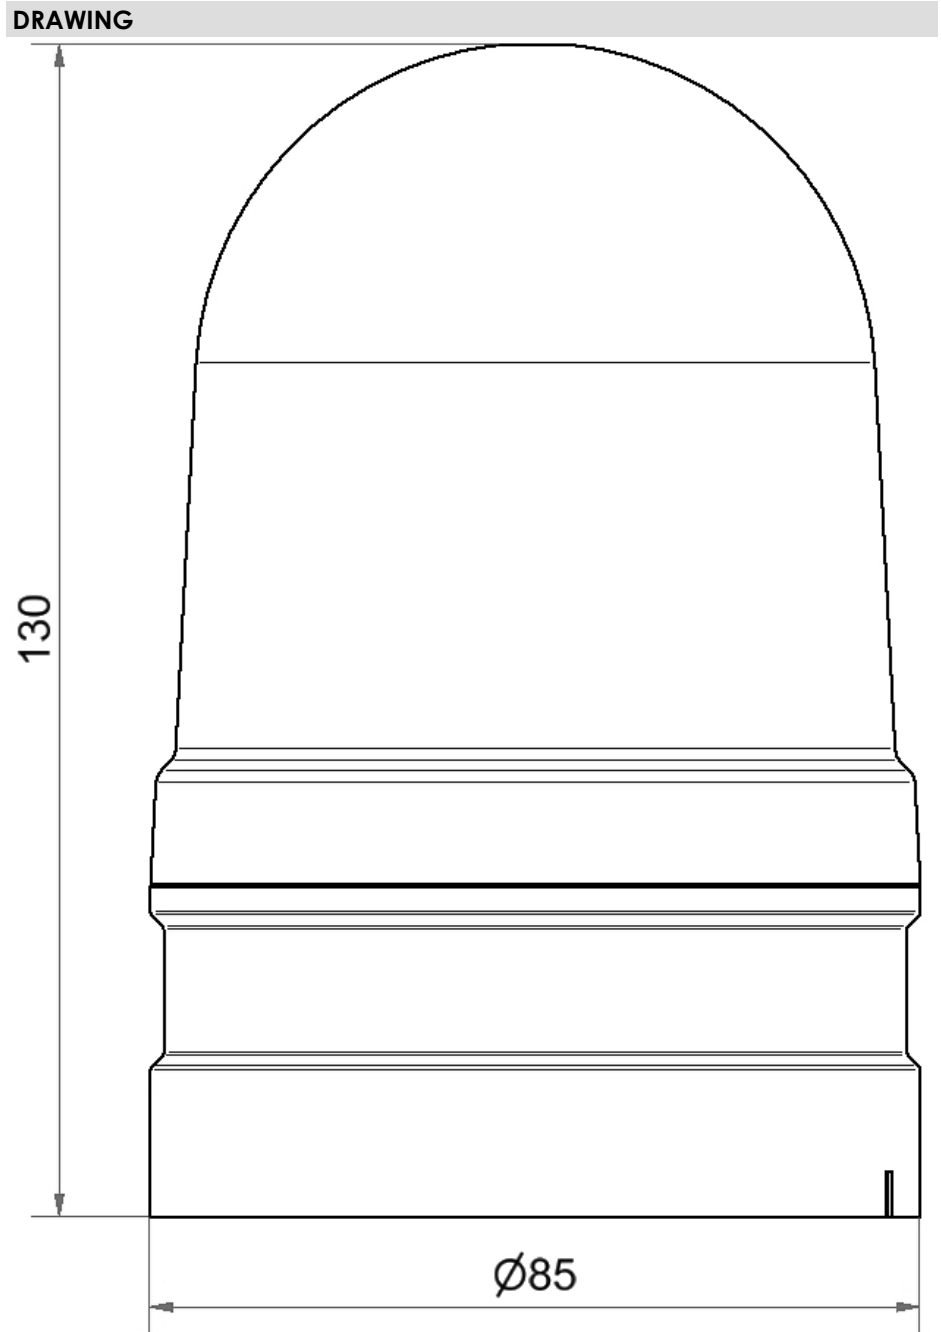

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.